


KEY FEATURES:

- Produces spot-free rinse, no need to wipe
- No chamoising saves time and money, and puts an end to scratches and swirl marks.
- No hard water buildup, eliminates scaling, stains, pitting and etching
- Helps maintain paint, aluminum, chrome, and glass, leaving zero water spots
- No need for water storage tanks. Simply attach your feed water hose.
- Weighs up to 20% less than alternative units
- Intelligent control system with service indicator
- Convenient On/Off touch switch for your safety
- 100% sealed electrical plug with watertight cap
- Produces pure drinking water, eliminating the need for on-board bottled water

SPOT-FREE RINSING WHEREVER, WHENEVER.


The FCI DTS+ (Dockside Treatment System) has been providing spot-free water solutions for decades. The DTS+Mobile now provides boaters with a mobile, spot-free solution from a dockside or municipal source. Simply attach your water supply hose, and enjoy purified spot-free water for rinsing. The DTS+ system removes up to 99% of total dissolved solids (TDS), purifying water as low as 5 PPM, and leads to a spot-free shine. The DTS+Mobile puts an end to tedious, time-consuming maintenance. Extend the life of your vessel's paint and wax finishes, and spend less time wiping down, polishing and applying compound. Dark colored hulls, no problem. Eliminate pitting and water spot etching, and make quick work of eisenglass, motor, galleys and metal work. With zero hard water buildup, maintaining your rods and reels, appliances and interior details (bathroom and galley fixtures) are a breeze. The purified water can also be used to fill your freshwater tank. No more cleaning the ice-maker, and do away with on-board bottled water. The cost and time-saving implications are endless. *FCI Watermakers, your reliable water source for over 30 years.*



Spot-free rinse means no swirl marks, etching or scratching.



No more chamois-drying windows, rails, and hard-to-reach areas.




Eliminate hard water build-up on your gear, galley and appliances.



100% sealed electrical plug, and large wheels for easy mobility.


FEATURES

- **ERGONOMICALLY** designed handles for easy lifting
- **100% Sealed** electrical plug with watertight cap
- **LARGE WHEELS** for easy movement and mobility
- **FILTER CHANGE INDICATOR** lets you know when it's time to change your filter
- **ON / OFF TOUCH CONTROL SWITCH** for easy use and safety

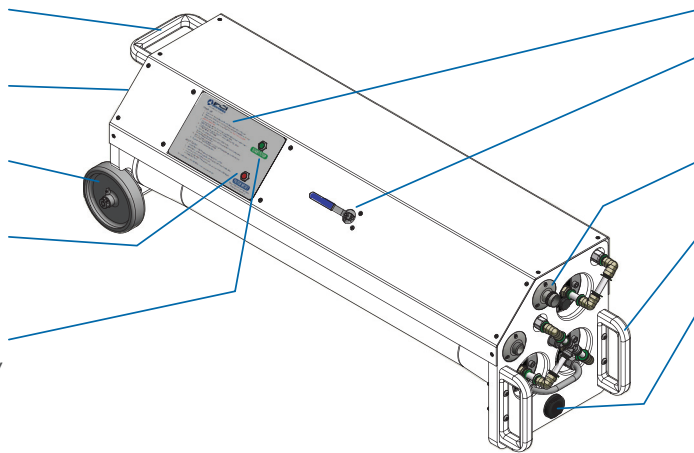

- **NEMA 4X / IP 67 Rated Enclosure**
- **FLUSH / OPERATION VALVE** uses a simple twist handle to select operation mode
- **EASY-ACCESS HOSE CONNECTIONS** for quick setup and take-down
- **DUAL HANDLES** for easy movement
- **BRINE DISCHARGE** automatically shuts off to save operational cost and water


DIMENSIONS

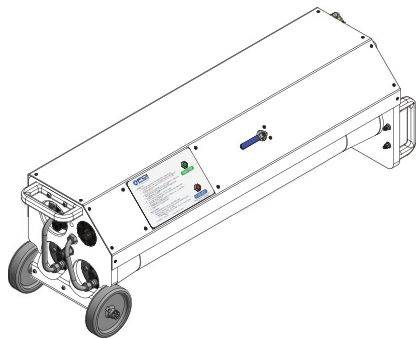

DTS+MOBILE UNIT

| | |
|--------|-----------------------|
| Width | 51.30 in / 1303.02 mm |
| Depth | 14.75 in / 374.65 mm |
| Height | 15.38 in / 390.65 mm |

AVAILABLE PRODUCT OPTIONS



#91-7105

COVER

| | |
|--------|-----------------------|
| Width | 54.00 in / 1371.60 mm |
| Depth | 16.00 in / 406.40 mm |
| Height | 15.25 in / 387.35 mm |



#93-7380

CLEANING KIT


| | |
|--------|----------------------|
| Width | 10.07 in / 255.78 mm |
| Depth | 12.28 in / 311.91 mm |
| Height | 14.08 in / 357.63 mm |



#93-7465

PRE-FILTER ASSEMBLY (BULKHEAD MOUNT)

| | |
|--------|----------------------|
| Width | 19.18 in / 487.17 mm |
| Depth | 8.00 in / 203.20 mm |
| Height | 13.88 in / 352.56 mm |



#93-7466

PRE-FILTER ASSEMBLY (GROUND MOUNT)

| | |
|--------|----------------------|
| Width | 21.63 in / 549.40 mm |
| Depth | 12.28 in / 311.91 mm |
| Height | 17.43 in / 442.72 mm |

REQUIREMENTS

UTILITIES

| | | |
|-----------------------|----------------------|-----------|
| Inlet Hose Connection | Wash Hose Connection | Reject |
| 3/4" FGHT | 3/4" MGHT | 1/2" FNPT |

ELECTRICAL

| | | | | |
|-----|------|---------------|---------|----|
| HP | KW | VAC | HZ | PH |
| 0.5 | 0.37 | 120 / 208-240 | 50 / 60 | 1 |

MODEL

| | Weight (LBS / KG) | Converts Dockwater to Spot-free Water | On / Off Control | Auto Shutoff Feature | 120 VAC | 208-240 VAC | Up to 70% Recycle Rate |
|----------------|----------------------|--|---------------------|-------------------------|------------|----------------|---------------------------|
| DTS+Mobile-120 | 125 / 56.70 | | | | | | |
| DTS+Mobile-220 | 125 / 56.70 | | | | | | |

System Rated Based on Typical Dock Water Conditions: Temperature 77° F / 25° C | TDS 500 | Pressure 125 PSI
System Conversion on Dock Water: Up to 1000 PPM | Chlorine Tolerance > 0.1